


R-1500 / R-1100 (8") FRAME AND LID ADJUSTED TO GRADE WITH PRECAST RISER RINGS SEALED WITH BUTYL RUBBER. *

OPTIONAL HEIGHTH ADJUSTMENT USING 48" I.D. RINGS AVAIL. IN 12", 16", 32", 48", AND 64" HEIGHTHS.

R-1976 INSPECTION LID

12" RCCP AND 18B BOOT OPTIONAL UPON REQUEST.

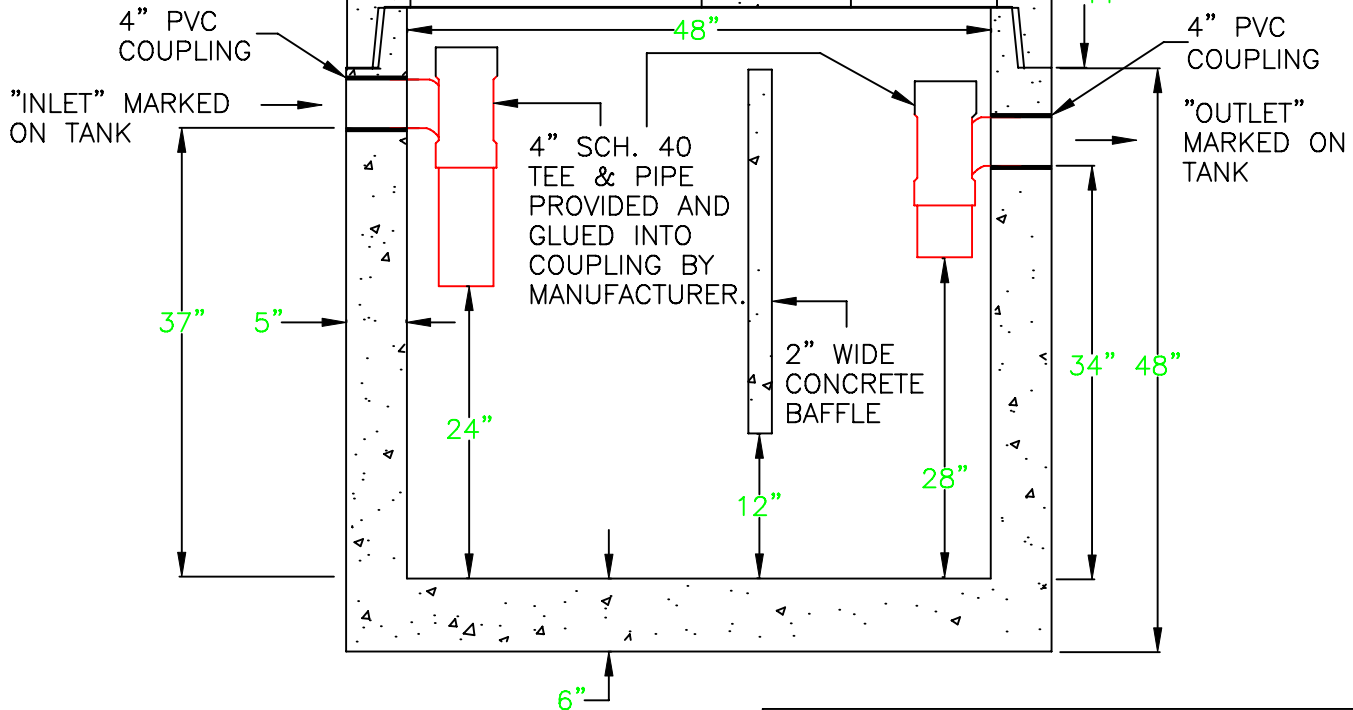

* CASTING AND RISER RING NOT INCLUDED IN GREASE TRAP PRICE.

DARNALL CONCRETE PRODUCTS COMPANY

250 GALLON ROUND GREASE TRAP

6/27/2012